


Image not found or type unknown



Technical information

Productnumber : 77-A121112

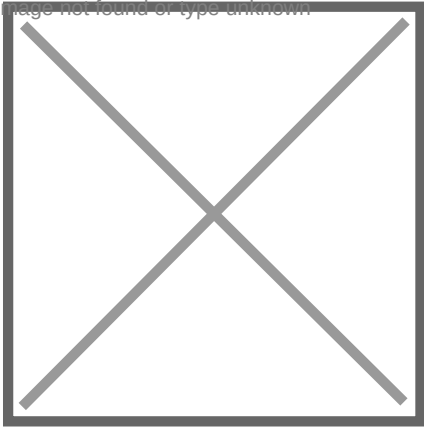

Product description

Rolling scaffold MI Tower for rental, demolition or maintenance companies, painters, installers, electricians and freelancers

- Rolling scaffold for 1 person.
- Set up and take down in 10 minutes.
- Very compact to transport.
- Platform with suspension hooks on the side.
- Takes up little floor space.
- Max. load per level (Pressure) (kg/m²) 150 kg/m²
- Working height (m) 4.20 m
- Platform height (m) 2.20 m
- Platform length (m) 1.27 m
- Platform width (m) 0.8 m
- Material ALUMINUM
- Floor area length (m) 2.93 m
- Floor area width (m) 2.49 m
- Max. load (kg) 150 kg
- Weight (kg) 78 kg
- Wheel Ø (mm) 125 mm
- EN Norm EN 1004
- Folded height (m) 1.60 m
- Step width (mm) 800 mm
- Folded length (m) 1.27 m
- Folded width (m) 0.6 m

Specifications

Article arrangement: New

Version: quick build

Subgroup: Mobile scaffolding

Type: Altrex mobile scaffolding

Material: aluminium

Colour: alu silver



KRUIZINGA.NL®
Opslag- en transportmiddelen

KRUIZINGA.DE®
Lager- und Transportmittel

KRUIZINGA.FR®
Stockage et ressources de transport

KRUIZINGA.COM®
Material handling equipment

Image not found or type unknown

Width (mm): 2930
Depth (mm): 2490
Weight (kg) 78
Type number: C003002
Horizontal platform (mm): 2200
EAN Code (Gtin) 8719424213492

Scan the QR code for more information



Technical information

Productnumber : 77-A121112

Height (mm): 3000
Loading capacity (kg): 150
Options: Norm: EN1004
Additional specifications: type use: professional
Work height (mm): 4200



KRUIZINGA.NL[®]
Opslag- en transportmiddelen

KRUIZINGA.DE[®]
Lager- und Transportmittel

KRUIZINGA.FR[®]
Stockage et ressources de transport

KRUIZINGA.COM[®]
Material handling equipment