


Image not found or type unknown

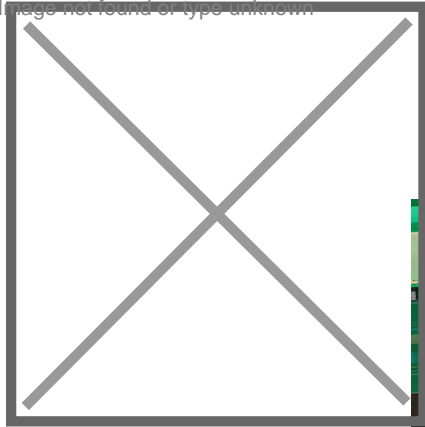

Technical information

Productnumber : 8615001011

Product description

High quality ramp suitable for loading medium to heavy vehicles such as construction machines, garden machines or ride-on mowers, which are equipped with pneumatic tires or rubber tracks. The driving surface is reinforced at the bottom, which significantly extends the life of the driving plates. Weight per driving plate is 61 kg. The load capacity shown is per set!

This ramp is supplied as standard with connection A and a flat floor 1 , see detail photos. It is optionally possible to adjust this to your liking, please contact us for the possibilities or indicate your preference during the ordering process.

Specifications

Article arrangement: New

Version: aluminium 450 cm (pair)

Top: driving area of anti slip profile

Width (mm): 460

Loading capacity (kg): 3950

Type number: AVS-150

Height difference max (mm): 30% with max. height

Max Height (mm): 1230

Type: access ramp straight

Material: aluminium

Length (mm): 4485

Internal width (mm): 368

Weight (kg) 61

Batch (items): 2

Min Height (mm): 950

EAN Code (Gtin) 8719424127096

Scan the QR code for more information



KRUIZINGA.NL®
Opslag- en transportmiddelen

KRUIZINGA.DE®
Lager- und Transportmittel

KRUIZINGA.FR®
Stockage et ressources de transport

KRUIZINGA.COM®
Material handling equipment