


Image not found or type unknown

Technical information

Productnumber : 8611001002

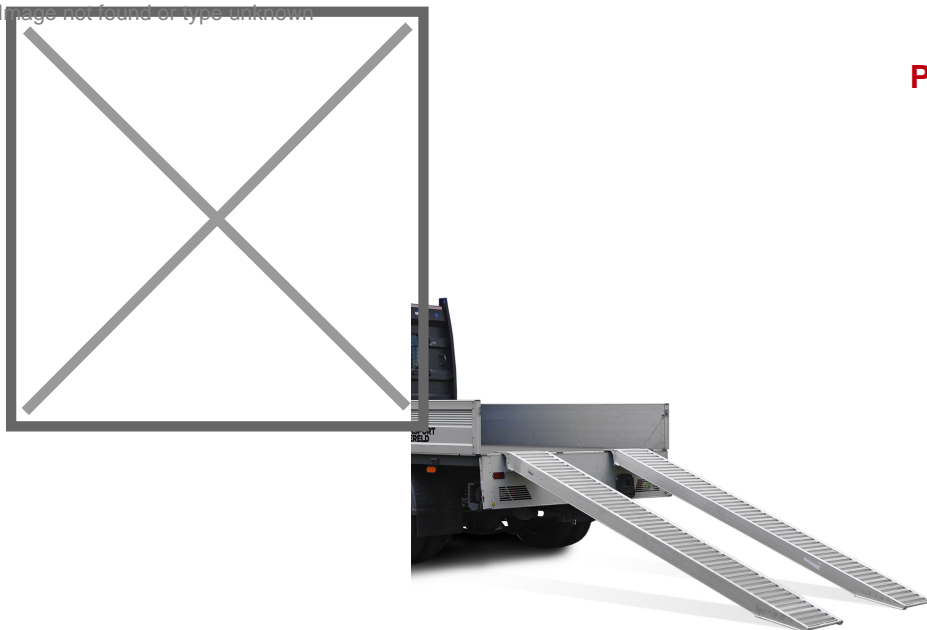

Product description

High-quality ramps suitable for loading light to medium-heavy vehicles such as construction machines, garden machines or ride-on mowers, which are equipped with pneumatic tires or rubber tracks. The driving surface is reinforced at the bottom, which significantly extends the life of the driving plates. Weight per driving plate is 15 kg. The load capacity shown is per set, with an axle distance of 1500 mm. Suitable for a ramp height of 43 to 54 cm.

This ramp is supplied as standard with connection A and a flat floor 1, see detail photos. It is optionally possible to adjust this to your liking, please contact us for the possibilities or indicate your preference during the ordering process.

Specifications

Article arrangement: New
Version: aluminium 200 cm (pair)
Floor: driving area of anti slip profile
Width (mm): 325
Height (mm): 110
Weight (kg) 15
Batch (items): 2
Max Height (mm): 540

Type: access ramp straight
Material: aluminium
Length (mm): 1970
Internal width (mm): 245
Loading capacity (kg): 3310
Type number: AVS110
Min Height (mm): 430
EAN Code (Gtin) 8719424024937

Scan the QR code for more information



KRUIZINGA.NL[®]
Opslag- en transportmiddelen

KRUIZINGA.DE[®]
Lager- und Transportmittel

KRUIZINGA.FR[®]
Stockage et ressources de transport

KRUIZINGA.COM[®]
Material handling equipment