


Image not found or type unknown

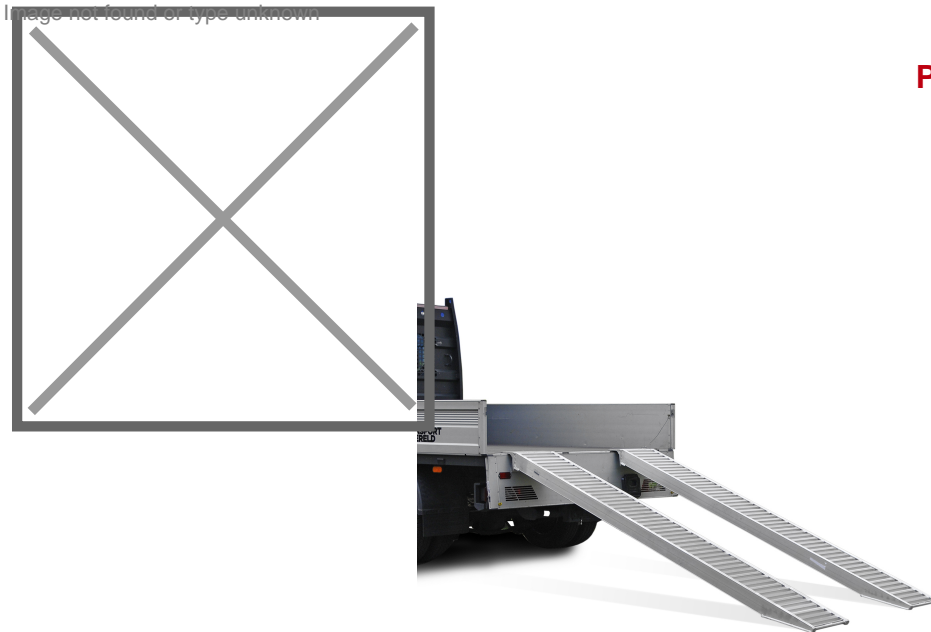

Technical information

Productnumber : 8611001010

Product description

High-quality ramps suitable for loading light to medium-heavy vehicles such as construction machines, garden machines or ride-on mowers, which are equipped with pneumatic tires or rubber tracks. The driving surface is reinforced at the bottom, which significantly extends the life of the driving plates. Weight per driving plate is 23 kg. The load capacity shown is per set, with an axle distance of 1500 mm. Suitable for a ramp height of 71 to 90 cm.

This ramp is supplied as standard with connection A and a flat floor 1, see detail photos. It is optionally possible to adjust this to your liking, please contact us for the possibilities or indicate your preference during the ordering process.

Specifications

Article arrangement: New
Version: aluminium 320 cm (pair)
Floor: driving area of anti slip profile
Width (mm): 325
Height (mm): 110
Weight (kg) 23
Batch (items): 2
Max Height (mm): 900

Type: access ramp straight
Material: aluminium
Length (mm): 3230
Internal width (mm): 245
Loading capacity (kg): 1810
Type number: AVS110
Min Height (mm): 710
EAN Code (Gtin) 8719424024975

Scan the QR code for more information



KRUIZINGA.NL®
Opslag- en transportmiddelen

KRUIZINGA.DE®
Lager- und Transportmittel

KRUIZINGA.FR®
Stockage et ressources de transport

KRUIZINGA.COM®
Material handling equipment