


## Technical information

**Productnumber : 8611001015**

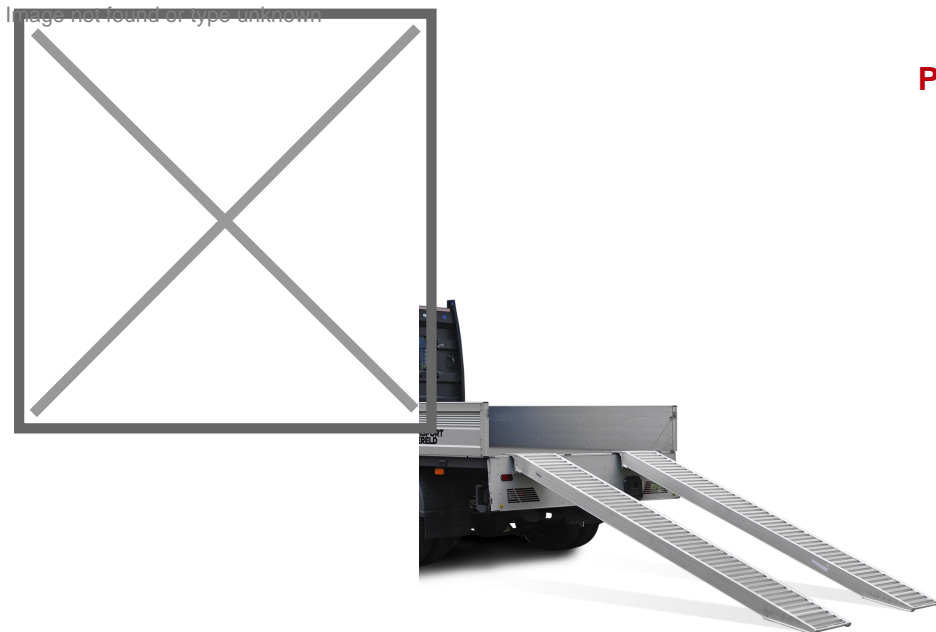

### Product description

High-quality ramps suitable for loading light to medium-heavy vehicles such as construction machines, garden machines or ride-on mowers, which are equipped with pneumatic tires or rubber tracks. The driving surface is reinforced at the bottom, which significantly extends the life of the driving plates. Weight per driving plate is 28 kg. The load capacity shown is per set, with an axle distance of 1500 mm. Suitable for a ramp height of 88 to 111 cm.

This ramp is supplied as standard with connection A and a flat floor 1, see detail photos. It is optionally possible to adjust this to your liking, please contact us for the possibilities or indicate your preference during the ordering process.

### Specifications

Article arrangement: New  
Version: aluminium 400 cm (pair)  
Floor: driving area of anti slip profile  
Width (mm): 325  
Height (mm): 110  
Weight (kg) 28  
Batch (items): 2  
Max Height (mm): 1110

Type: access ramp straight  
Material: aluminium  
Length (mm): 3950  
Internal width (mm): 245  
Loading capacity (kg): 1360  
Type number: AVS110  
Min Height (mm): 880  
EAN Code (Gtin) 8719424024999

Scan the QR code for more information



**KRUIZINGA.NL®**  
Opslag- en transportmiddelen

**KRUIZINGA.DE®**  
Lager- und Transportmittel

**KRUIZINGA.FR®**  
Stockage et ressources de transport

**KRUIZINGA.COM®**  
Material handling equipment