


Image not found or type unknown

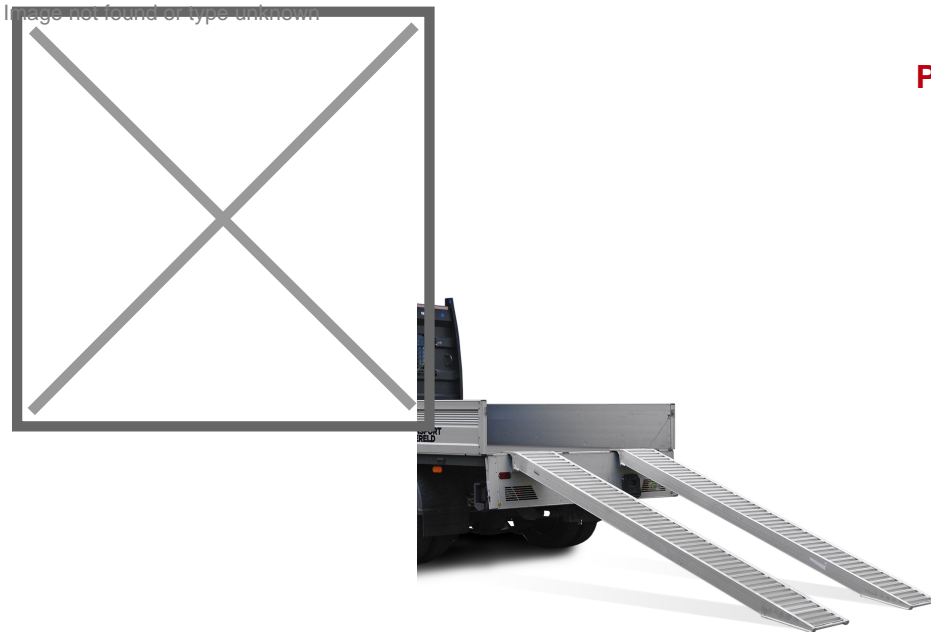

## Technical information

**Productnumber : 8611001020**

### Product description

High-quality ramps suitable for loading light to medium-heavy vehicles such as construction machines, garden machines or ride-on mowers, which are equipped with pneumatic tires or rubber tracks. The driving surface is reinforced at the bottom, which significantly extends the life of the driving plates. Weight per driving plate is 32 kg. The load capacity shown is per set, with an axle distance of 1500 mm. Suitable for a ramp height of 104 to 131 cm.

This ramp is supplied as standard with connection A and a flat floor 1, see detail photos. It is optionally possible to adjust this to your liking, please contact us for the possibilities or indicate your preference during the ordering process.

### Specifications

Article arrangement: New

Version: aluminium 470 cm (pair)

Floor: driving area of anti slip profile

Width (mm): 325

Height (mm): 110

Weight (kg) 32

Batch (items): 2

Max Height (mm): 1310

Type: access ramp straight

Material: aluminium

Length (mm): 4670

Internal width (mm): 245

Loading capacity (kg): 1090

Type number: AVS110

Min Height (mm): 1040

EAN Code (Gtin) 8719424025002

Scan the QR code for more information



**KRUIZINGA.NL<sup>®</sup>**  
Opslag- en transportmiddelen

**KRUIZINGA.DE<sup>®</sup>**  
Lager- und Transportmittel

**KRUIZINGA.FR<sup>®</sup>**  
Stockage et ressources de transport

**KRUIZINGA.COM<sup>®</sup>**  
Material handling equipment