


Image not found or type unknown

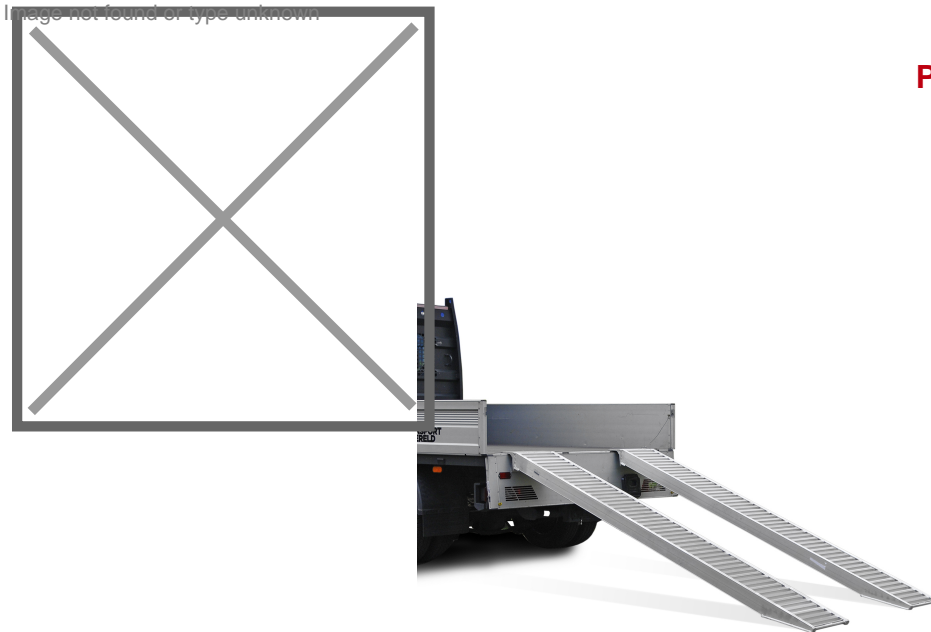

Technical information

Productnumber : 8611001036

Product description

High-quality ramps suitable for loading light to medium-heavy vehicles such as construction machines, garden machines or ride-on mowers, which are equipped with pneumatic tires or rubber tracks. The driving surface is reinforced at the bottom, which significantly extends the life of the driving plates. Weight per driving plate is 28 kg. The load capacity shown is per set, with an axle distance of 1500 mm. Suitable for a ramp height of 75 to 95 cm.

This ramp is supplied as standard with connection A and a flat floor 1, see detail photos. It is optionally possible to adjust this to your liking, please contact us for the possibilities or indicate your preference during the ordering process.

Specifications

Article arrangement: New
Version: aluminium 340 cm (pair)
Floor: driving area of anti slip profile
Width (mm): 420
Height (mm): 110
Weight (kg) 28
Batch (items): 2
Max Height (mm): 950

Type: access ramp straight
Material: aluminium
Length (mm): 3410
Internal width (mm): 340
Loading capacity (kg): 1670
Type number: AVS110
Min Height (mm): 750
EAN Code (Gtin) 8719424025071

Scan the QR code for more information



KRUIZINGA.NL[®]
Opslag- en transportmiddelen

KRUIZINGA.DE[®]
Lager- und Transportmittel

KRUIZINGA.FR[®]
Stockage et ressources de transport

KRUIZINGA.COM[®]
Material handling equipment