


Image not found or type unknown

Technical information

Productnumber : 8611001039

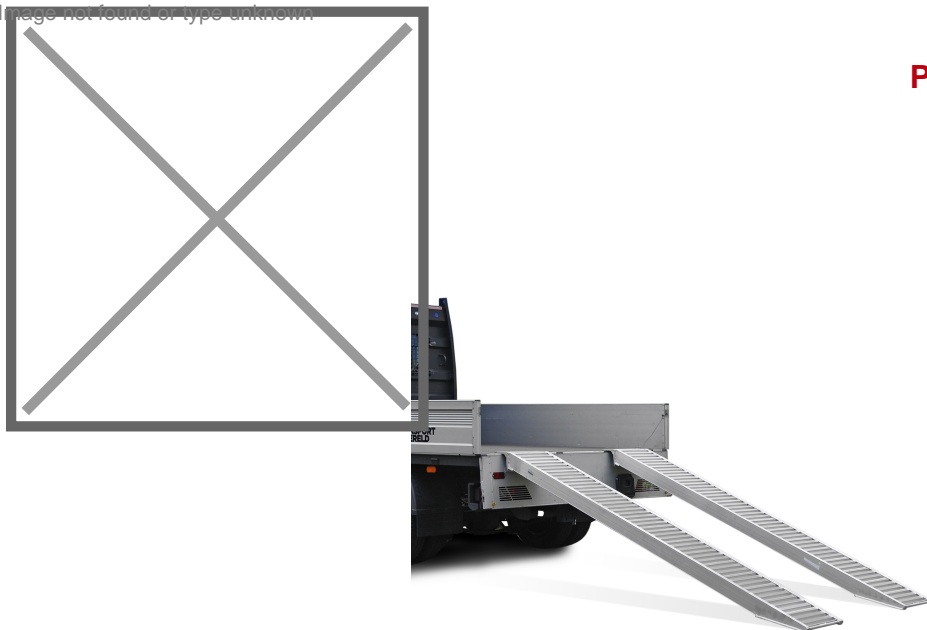

Product description

High-quality ramps suitable for loading light to medium-heavy vehicles such as construction machines, garden machines or ride-on mowers, which are equipped with pneumatic tires or rubber tracks. The driving surface is reinforced at the bottom, which significantly extends the life of the driving plates. Weight per driving plate is 32 kg. The load capacity shown is per set, with an axle distance of 1500 mm. Suitable for a ramp height of 88 to 1110 cm.

This ramp is supplied as standard with connection A and a flat floor 1, see detail photos. It is optionally possible to adjust this to your liking, please contact us for the possibilities or indicate your preference during the ordering process.

Specifications

Article arrangement: New

Version: aluminium 400 cm (pair)

Floor: driving area of anti slip profile

Width (mm): 420

Height (mm): 110

Weight (kg) 32

Batch (items): 2

Max Height (mm): 1110

Type: access ramp straight

Material: aluminium

Length (mm): 3950

Internal width (mm): 340

Loading capacity (kg): 1360

Type number: AVS110

Min Height (mm): 880

EAN Code (Gtin) 8719424025088

Scan the QR code for more information



KRUIZINGA.NL[®]
Opslag- en transportmiddelen

KRUIZINGA.DE[®]
Lager- und Transportmittel

KRUIZINGA.FR[®]
Stockage et ressources de transport

KRUIZINGA.COM[®]
Material handling equipment