
Technical information Productnumber : 414GV

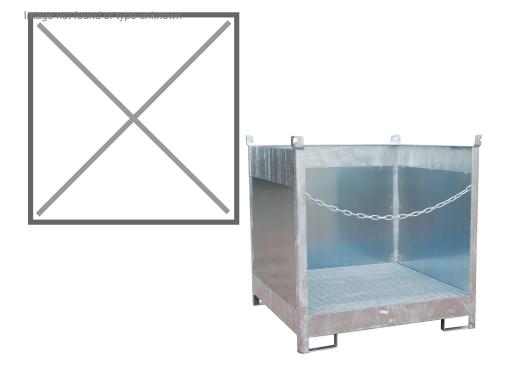

Product description

Guideline for storage and temporary storage for drip trays with regard to fire safety, occupational safety and environmental safety according to PGS 15 (publication series hazardous substances):

A storage facility must be constructed in such a way that leaked or spilled hazardous liquid is collected in a container. To this end, the collection container must have a capacity of at least 110% of the largest package. However, if 10% of the total content of the packages is more than 110% of the content of the largest package, then the collection capacity must be equal to 10% of the total content of the packages together. The collection container must be sufficiently resistant to the stored liquids.

The collection capacity only applies to liquids. Empty, uncleaned packaging does not count. The collection facility may also be realized in storage. The choice of location for the collection facility may depend on the hazardous liquids stored. Kruizinga.nl is not liable for the type of use!

Please note! Any form of modification is not allowed. If this is the case, all regulations will lapse.

Specifications

Article arrangement: New Version: for 1-4 200 l drums Walls: splash protection 3-sides Top: 1000kg/m2 Colour: colorless Length (mm): 1410 Height (mm): 1435 Weight (kg) 224 Type number: 41G EAN Code (Gtin) 8719424007893 Type: Retention Basin Material: steel Floor: with galvanized grid Subgroup: retention basin steel Surface treatment: galvanized Width (mm): 1410 Application: stacking - not certified to hoist Collection volume (ltr): 275 Additional specifications: StawaR approved (DE)

Scan the QR code for more information






















KRUIZINGA.FR® Stockage et ressources de transport

